


# LOGIC TAG

## Tag4all ST



- ✓ UHF Class 1 Generation2 Compliant
- ✓ Up to 10 meter reading range
- ✓ Best performance on metallic and plastic surface
- ✓ Easy install on ferrite surface
- ✓ With extended memory for broader applications

Tag4allST are now available for both metallic and non-metallic surfaces; with more strong and tough cases. Tag4allST suits for all rugged situations in any industrial environment; works perfectly in bad, wet situation inside supply-chain and warehouse operation areas ; Tag4allST gives excellent tag performance.

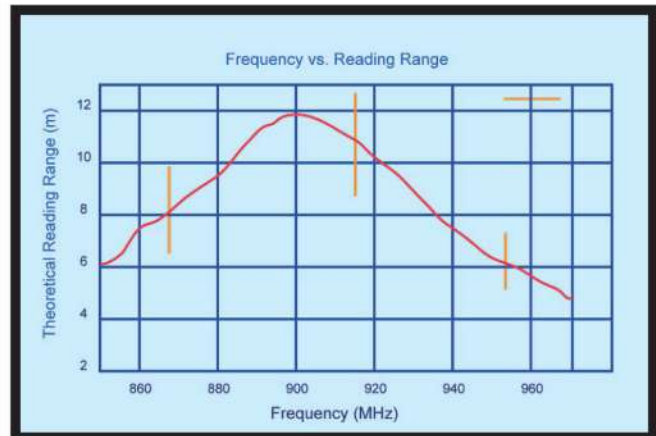

### Technical Specifications Table

Dimension	152mm (L) x 16mm (H) x 15mm (W)
Type	Class 1 G2 passive UHF RFID Transponder
Air Interface Protocol	EPCGlobal Class1 G2 ISO 18000-6C
Memory	240bit EPC + 512 bit
Read Range	2.5 - 4 m, Reader Power 500mW ERP
Weight	40g
Protector Class	IP67
Operating Temperature	-10°C to +65°C
Humidity	5-95% (Non-condensing)
Special Features	On-metal surface with superior performance Also perform excellent in other surface
Free Mounting	With bolt and nut, or cable tie

**Contact Us:** If you have further enquiries, please contact us for more information & discussion.

### Million Tech Development Limited

Address: Unit 509, 5/F, Tower II, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Road, Kowloon, Hong Kong

General Line: (852) 2788 3306

Sales Enquiry: (852) 2784 2868

Service Hotline: (852) 2784 2888

F a x : (852) 2319 2967

E mail: sales@milliontech.com

E mail: helpdesk@milliontech.com

Website: <https://milliontech.com>