

SLP-TX400

4 inch Thermal Transfer
Desktop Label Printer



Retail



Healthcare
&
Pharmacy



Post &
Parcel



Warehouse &
Storage
Handling

Durable and Premium




Powerful Printing Performance

- Paper feeding speed up to 7 ips (178 mm/sec)
- Thermal Transfer, Direct Thermal supported
- Fast data processing speed of various types of label

Smart Media Detection™

- Automatic paper detection such as gap media, black mark media and short length media paper

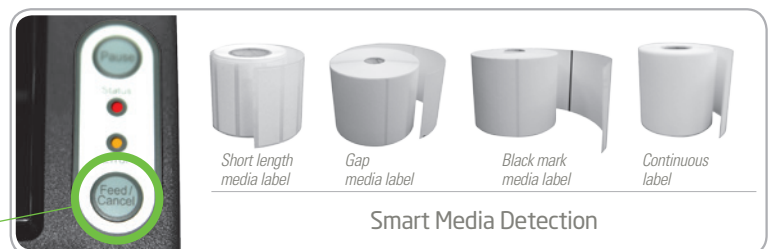

SLP-TX400

4 inch Thermal Transfer Desktop Label Printer



Ivory



Dark Gray

Features

All-in-one Interface

- Standard:
USB + Serial + Parallel
- Optional:
USB + Serial + Ethernet + WLAN*



User-Friendly Options

- Easy installation Auto-Cutter
- Real-Time clock



Auto-Cutter : Easy installation

Powerful Compatibility

The SLP-TX400 is fully compatible with market-leading programming language;
SLCS, BPL-Z™, BPL-E™.



BPL-Z™

BPL-E™

Label Artist™

Bixolon provides its custom label design program as bundle. It supports database connection as well as text, drawing lines and boxes, all kinds of graphics and 1D/2D Barcode printing.

Features

Print Characteristics

Printing Method: Thermal Transfer, Direct Thermal
Printing Speed: SLP-TX400: Up to 7 ips (178 mm/sec) / SLP-TX403: Up to 5 ips (127 mm/sec)
Print Resolution: SLP-TX400: 203 dpi / SLP-TX403: 300 dpi
Printing Width: SLP-TX400: Up to 108 mm / SLP-TX403: Up to 105.7 mm
Printing Length: 6 ~ 1000mm
Sensor: Transmissive, Reflective (adjustable), Ribbon-End, Head open

Media Characteristics

Media Type: Gap, Black Mark, Notch, Continuous, Fan-Fold
Media Width: 25 ~ 116 mm
Media Roll Diameter: Up to 130 mm
Media Thickness: 0.06 ~ 0.20 mm
Supply Method: Easy Paper Loading

Ribbon Characteristics

Ribbon Type: Wax, Wax / Resin, Resin, Outside
Ribbon Width: 33 ~ 110 mm
Ribbon Length: Up to 300 m
Core Inner Diameter: 25.4 mm, 12.5 mm

Physical Characteristics

Dimensions (W x L x H): 214 x 310 x 195 mm (8.42 x 12.20 x 7.67 inch)
Weight: 2.85 kg (6.28 lbs.)
Power: EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory: 64MB SDRAM, 128MB FlashROM
Interface: Triple Interface
Standard: USB + Serial + Parallel
Optional: USB + Serial + Ethernet + WLAN*
* WLAN: 802.11b/g/n USB dongle type (optional)

Environment Characteristics

Temperature: Operating: 5 ~ 40 °C (41 ~ 104 °F) / Storage: -20 ~ 60 °C (-4 ~ 140 °F)
Humidity: Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH

Software

Emulation: SLCS, BPL-Z™, BPL-E™
Driver / Utility: Windows Driver (Euro Plus/Seagull), Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
SDK: Android SDK, Windows SDK

Fonts / Graphics / Symbologies

- Fonts:**
- 10 SLCS Resident Bitmap Fonts
 - One SLCS Resident Scalable Font
 - 16 BPL-Z™ Resident Bitmap Fonts
 - One BPL-Z™ Resident Scalable Font
 - 5 BPL-E™ Resident Bitmap Fonts
 - 23 Code Page
 - Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics: Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies:

1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB
2D: Aztec, Codablock, Code 49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR code, TLC 39

Options

Ethernet, WLAN (USB dongle type), Peeler, Auto Cutter, RTC (Real Time Clock), External Paper Supply



Contact Us: If you have further enquiries, please contact us for more information & discussion.